



Sets the desired attenuation level for the bass frequencies. 0 is silent, for dummy load purposes.

Bypass the attenuation and send the full signal to your speaker(s). Line out still functional.

Sets the desired attenuation level for the treble frequencies. 0 is silent, for dummy load purposes.

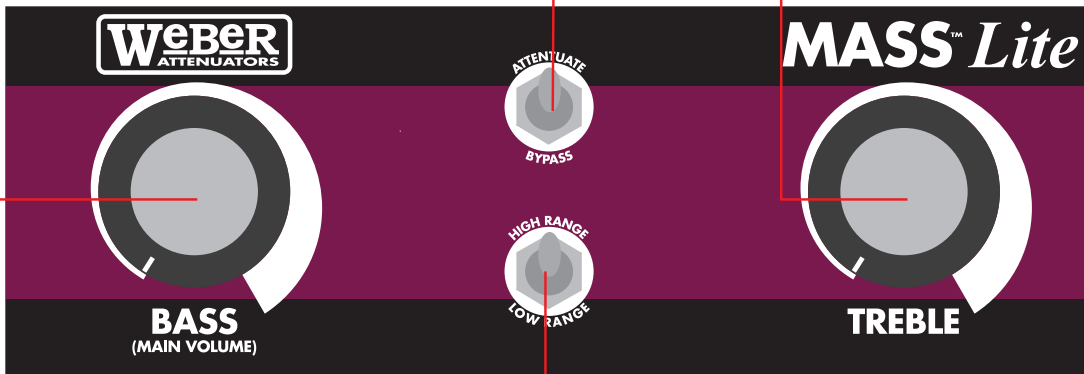

The low position adds 6db of attenuation to the setting of the attenuator control.

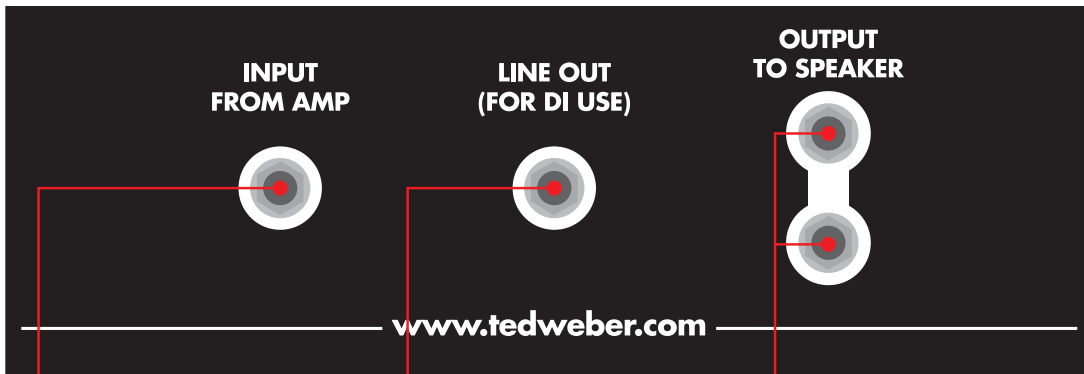

Signal from your amp

Line level signal out to PA, recording mixer, etc.

Signal out to speaker(s). Parallel Outputs